




1676

High Temp PVC Fineline Masking Tape

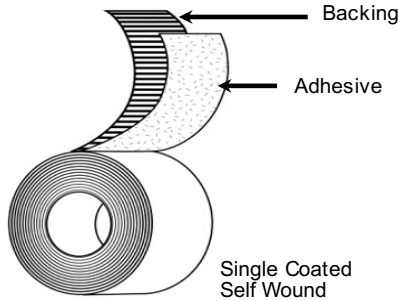

- Backing:** PVC Film
- Adhesive:** Rubber (R405)
- Liner:** N/A
- Colors:** Light Blue (Low Gloss)
- Specifications:** N/A
- Size Options:** Incremental sizes 0.118" - 47.5" x 108Ft

Applications

- Masking color separations on plastic (TPO & RIM) automotive fascia, trim, and finished metals in high temp OEM bake cycles (280 °F for 45 min)*
- Aircraft paint operations
- OEM paint line powerwash cycles
- Clean room paint masking

Features

- PVC Film Backing
- Rubber Based Adhesive
- Clean-cut Plastic Core

Benefits

- Tough and conformable
- Translucent for easy application and inspection
- Waterproof and solvent resistant
- Crisp, fineline edge
- Printable and die-cuttable
- Good high temperature performance
- Stain and ghosting resistant
- Recyclable and clean - no dust or contaminants

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	5.5	mils	0.140	mm	PSTC-133
Substrate Thickness	4	mils	0.102	mm	PSTC-133
Adhesion to Steel	24	oz/in	2.63	N/cm	ASTM D-3330
Tensile Strength	16	lb/in	28.02	N/cm	ASTM D-3759
Elongation	110%				
Application Temperature	60 to 120 °F		16 to 49 °C		
Operating Temperature	40 to 280 °F		4.4 to 138 °C		

*Room temperature demask recommended
 Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F
 Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Global's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038
 1-800-343-7875 Fax 1-800-328-4822
 www.berryglobal.com
 10/8/17